



Rec'd PCT/PTO 26 MAY 2005
PCT/GB 2003 / 005375



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 13 JAN 2004	
WIPO	PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

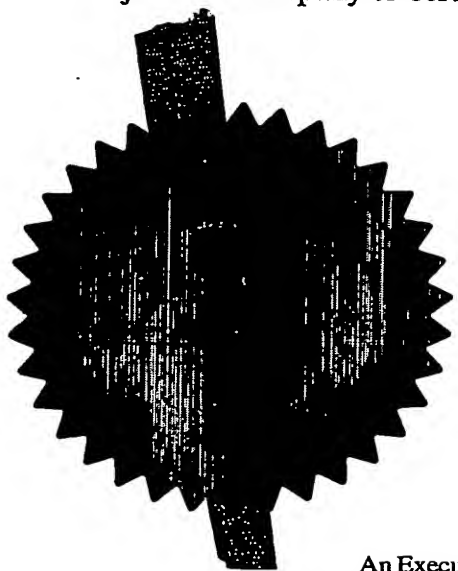

Signed *10 Behan*

Dated 21 November 2003

BEST AVAILABLE COPY

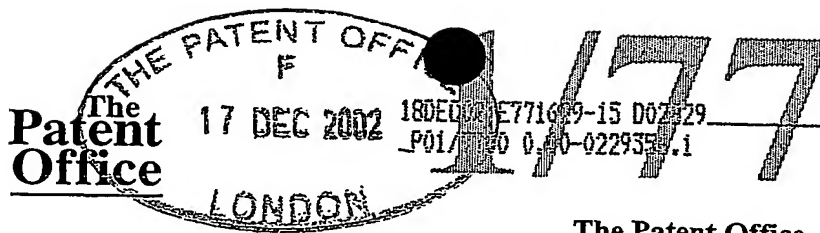

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference J00044659GB

2. Patent application number
(The Patent Office will fill in this part) 0229356.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)
The BOC Group plc
Chertsey Road
Windlesham
Surrey
GU20 6HJ
United Kingdom
Patents ADP number (if you know it) 7975949001
If the applicant is a corporate body, give the country/state of its incorporation UK

4. Title of the invention Vacuum Pumping Arrangement

5. Name of your agent (if you have one) RGC Jenkins & Co.
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
26 Caxton Street
London SW1H 0RJ
United Kingdom
Patents ADP number (if you know it) 03966736001
THE BOC GROUP PLC
CHERTSEY ROAD
WINDLESHAM
SURREY
GU20 6HJ
13.11.03
JAM

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications (and if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d)) YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	12
Claim(s)	3
Abstract	1
Drawing(s)	8 + 8

SW

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1/

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 17 December, 2002

R.G.C. JENKINS & CO

12. Name and daytime telephone number of person to contact in the United Kingdom

A. K. Abbie 020-7931-7141

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay, please contact the Patent Office.

VACUUM PUMPING ARRANGEMENT

The present invention relates to a vacuum pumping arrangement comprising a molecular pumping mechanism and a regenerative pumping mechanism.

A known vacuum pumping arrangement for evacuating a chamber comprises a molecular pump which may include: molecular drag pumping means; or turbomolecular pumping means; or both molecular drag pumping means and turbomolecular pumping means. If both pumping means are included the turbomolecular pumping means are connected in series with the molecular drag pumping means. The pumping arrangement is capable of evacuating the chamber to very low pressures in the region of 1×10^{-6} mbar. The compression ratio achieved by the molecular pump is not sufficient to achieve such low pressures whilst at the same time exhausting to atmosphere and therefore a backing pump is provided to reduce pressure at the exhaust of the molecular pump and hence permit very low pressures to be achieved at the inlet thereof.

When the chamber to be evacuated is part of a semiconductor processing system it is generally desirable that the chamber is kept free from contamination and therefore, the drive shaft of the molecular pump, which is disposed at the vacuum side of the vacuum pumping arrangement, is supported by a lubricant free bearing, since lubricant can be the cause of contamination. It is possible to use a magnetic bearing, which is lubricant

free, because even though a magnetic bearing's construction allows some radial movement of the drive shaft, operation of the molecular pump is not significantly affected by such radial movement. The drive shaft of a regenerative pump, which may be used as a backing pump, is typically supported by a lubricated bearing such as a lubricated rolling bearing because of the high loads and level of precision required with a regenerative pump. In other words, in a regenerative pump, the radial clearances between the rotor blades and the stator have to be very tightly controlled, and in some cases, restricted to no more than 80 microns. It has been considered therefore that the use of a regenerative pump in a clean environment is not appropriate because generally it is driven by a drive shaft supported by a lubricated bearing.

It is desirable to provide an improved vacuum pumping arrangement.

The present invention provides a vacuum pumping arrangement comprising a drive shaft, a motor for driving said drive shaft, a molecular pumping mechanism and a regenerative pumping mechanism, wherein said drive shaft is arranged for simultaneously driving said molecular pumping mechanism and said regenerative pumping mechanism and said drive shaft is supported by a lubricant free bearing associated with said molecular pumping mechanism.

Other aspects of the present invention are defined in the accompanying claims.

In order that the present invention may be well understood, some embodiments thereof, which are given by way of example only, will now be described with reference to the accompanying drawings, in which:

Figure 1 is a cross-sectional view of a vacuum pumping arrangement
5 shown schematically;

Figure 2 is an enlarged cross-sectional view of a portion of a regenerative pump of the arrangement shown in Figure 1;

Figure 3 is a diagram of a control system;

Figure 4 is a schematic representation of a vacuum pumping system;

10 Figure 5 is a schematic representation of another vacuum pumping system; and

Figures 6 to 8 are cross-sectional views of further vacuum pumping arrangements all shown schematically.

Referring to Figure 1, a vacuum pumping arrangement 10 is shown
15 schematically, which comprises a molecular pumping mechanism 12 and a backing pumping mechanism 14. The molecular pumping mechanism comprises turbomolecular pumping means 16 and molecular drag, or friction, pumping means 18. Alternatively, the molecular pumping mechanism may
20 comprise turbomolecular pumping means only or molecular drag pumping means only. The backing pump 14 comprises a regenerative pumping mechanism. A further drag pumping mechanism 20 may be associated with the regenerative pumping mechanism and provided between drag pumping mechanism 18 and regenerative pumping mechanism 14. Drag pumping

mechanism 20 comprises three drag pumping stages in series, whereas drag pumping mechanism 18 comprises two drag pumping stages in parallel.

Vacuum pumping arrangement 10 comprises a housing, which is formed in three separate parts 22, 24, 26, and which houses the molecular pumping mechanism 12, drag pumping mechanism 20 and regenerative pumping mechanism 14. Parts 22 and 24 may form the inner surfaces of the molecular pumping mechanism 12 and the drag pumping mechanism 20, as shown. Part 26 may form the stator of the regenerative pumping mechanism 14.

Part 26 defines a counter-sunk recess 28 which receives a lubricated bearing 30 for supporting a drive shaft 32, the bearing 30 being at a first end portion of the drive shaft associated with regenerative pumping mechanism 14. Bearing 30 may be a rolling bearing such as a ball bearing and may be lubricated, for instance with grease, because it is in a part of the pumping arrangement 10 distal from the inlet of the pumping arrangement. The inlet of the pumping arrangement may be in fluid connection with a semiconductor processing chamber in which a clean environment is required.

Drive shaft 32 is driven by motor 34 which as shown is supported by parts 22 and 24 of the housing. The motor may be supported at any convenient position in the vacuum pumping arrangement. Motor 34 is adapted to be able to drive simultaneously the regenerative pumping mechanism 14, and the drag pumping mechanism 20 supported thereby, and also the molecular pumping mechanism 12. Generally, a regenerative

pumping mechanism requires more power for operation than a molecular pumping mechanism, the regenerative pumping mechanism operating at pressures close to atmosphere where windage and air resistance is relatively high. A molecular pumping mechanism requires relatively less power for operation, and therefore, a motor selected for powering a regenerative pumping mechanism is also generally suitable for powering a molecular pumping mechanism. Means are provided for controlling the rotational speeds of the backing pumping mechanism and the molecular pumping mechanism so that pressure in a chamber connected to the arrangement can be controlled. A suitable control system diagram for controlling speed of the motor 34 is shown in Figure 3 and includes a pressure gauge 35 for measuring pressure in a chamber 33, and a controller 37 connected to the pressure gauge for controlling the pump's rotational speed.

Regenerative pumping mechanism 14 comprises a stator comprising a plurality of circumferential pumping channels disposed concentrically about a longitudinal axis A of the drive shaft 32 and a rotor comprising a plurality of arrays of rotor blades extending axially into respective said circumferential pumping channels. More specifically, regenerative pumping mechanism 14 comprises a rotor fixed relative to drive shaft 32. The regenerative pumping mechanism 14 comprises three pumping stages, and for each stage, a circumferential array of rotor blades 38 extends substantially orthogonally from one surface of the rotor body 36. The rotor blades 38 of the three arrays extend axially into respective circumferential pumping channels 40 disposed

concentrically in part 26 which constitutes the stator of the regenerative pumping mechanism 14. During operation, drive shaft 32 rotates rotor body 36 which causes the rotor blades 38 to travel along the pumping channels, pumping gas from inlet 42 in sequence along the radially outer pumping channel, radially middle pumping channel and radially inner pumping channel where it is exhausted from pumping mechanism 14 via exhaust 44 at pressures close to or at atmospheric pressure.

An enlarged cross-section of a single stage of the regenerative pumping mechanism is shown in Figure 2. For efficient operation of the regenerative pumping mechanism 14, it is important that the radial clearance "C" between rotor blades 38 and stator 26 is closely controlled, and preferably kept to no more than 200 microns or less, and preferably less than 80 microns, during operation. An increase in clearance "C" would lead to significant seepage of gas out of pumping channel 40 and reduce efficiency of regenerative pumping mechanism 14. Therefore, regenerative pumping mechanism 14 is associated with the lubricated rolling bearing 30 which substantially resists radial movement of the drive shaft 32 and hence rotor body 36. However, if there is radial movement of the drive shaft at an end thereof distal from the lubricated bearing 30, this may also cause radial movement of the rotor of the regenerative pumping mechanism, resulting in loss of efficiency. In other words, bearing 30 may act as a pivot about which some radial movement may take place. To avoid loss of efficiency, the rotor 36 of the regenerative pumping mechanism is connected to said drive shaft 32

so as to be sufficiently close to said lubricated bearing 30 (i.e. the pivot) so that radial movement of said drive shaft translates substantially to axial movement of said rotor blades relative to respective said circumferential pumping channels. Preferably, the bearing 30 is substantially axially aligned with the circumferential pumping channels so that any radial movement of the rotor blades 38 does not cause significant seepage. As shown, the stator 26 of the regenerative pumping mechanism 14 defines the recess for the bearing 30 and the rotor body 36 is, as it will be appreciated, adjacent the stator 26. Accordingly, the bearing 30, which resists radial movement, prevents significant radial movement of the rotor body 36 and also hence of the rotor blades 38. Therefore, clearance "C" between the rotor blades 38 and stator 26 can kept within tolerable limits.

Extending orthogonally from the rotor body 36 are two cylindrical drag cylinders 46 which together form rotors of drag pumping mechanism 20. The drag cylinders 46 are made from carbon fibre reinforced material which is both strong and light. The reduction in mass when using carbon fibre drag cylinders, as compared with the use of aluminium drag cylinders, produces less inertia when the drag pumping mechanism is in operation. Accordingly, the rotational speed of the drag pumping mechanism is easier to control.

The drag pumping mechanism 20 shown schematically is a Holweck type drag pumping mechanism in which stator portions 48 define a spiral channel between the inner surface of housing part 24 and the drag cylinders 46. Three drag stages are shown, each of which provides a spiral path for gas

flow between the rotor and the stator. The operation and structure of a Holweck drag pumping mechanism is well known. The gas flow follows a tortuous path flowing consecutively through the drag stages in series.

5 The molecular pumping mechanism 12 is driven at a distal end of drive shaft 32 from the regenerative pumping mechanism 14. A back up bearing may be provided to resist extreme radial movement of the drive shaft 32 during, for instance, power failure. As shown, the lubricant free bearing is a magnetic bearing 54 provided between rotor body 52 and a cylindrical portion 56 fixed relative to the housing part 22. A passive magnetic bearing is shown in which like poles of a magnet repel each other resisting excessive radial movement of rotor body 52 relative to the central axis A. In practice, the drive shaft may move about 0.1 mm.

15 A small amount of radial movement of the rotor of a molecular pumping mechanism does not significantly effect the pumping mechanism's performance. However, if it is desired to further resist radial movement, an active magnetic bearing may be adopted. In an active magnetic bearing, electro magnets are used rather than permanent magnets in passive magnetic bearings. Further provided is a detection means for detecting radial movement and for controlling the magnetic field to resist the radial movement. Figures 6 to 8 show an active magnetic bearing.

20 A circumferential array of angled rotor blades 58 extend radially outwardly from rotor body 52. At approximately half way along the rotor blades 58 at a radially intermediate portion of the array, a cylindrical support

ring 60 is provided, to which is connected drag cylinder 62 of drag pumping mechanism 18. Drag pumping mechanism 18 comprises two drag stages in parallel with a single drag cylinder 62, which may be made from carbon fibre to reduce inertia. Each of the stages is comprised of stator portions 64 forming with the tapered inner walls 66 of the housing 22 a spiral molecular gas flow channel. An outlet 68 is provided to exhaust gas from the drag pumping mechanism 18.

During normal operation, inlet 70 of pump arrangement 10 is connected to a chamber, the pressure of which it is desired to reduce. Motor 34 rotates drive shaft 32 which in turn drives rotor body 36 and rotor body 52. Gas in molecular flow conditions is drawn in through inlet 70 to the turbomolecular pumping means 16 which urges molecules into the molecular drag pumping means 18 along both parallel drag pumping stages and through outlet 68. Gas is then drawn through the three stages in series of the drag pumping mechanism 20 and into the regenerative pumping mechanism through inlet 42. Gas is exhausted at atmospheric pressure or thereabouts through exhaust port 44.

Regenerative pumping mechanism 14 is required to exhaust gas at approximately atmospheric pressure. Accordingly, the gas resistance to passage of the rotor blades 38 is considerable and therefore the power and torque characteristics of motor 34 must be selected to meet the requirements of the regenerative pumping mechanism 14. The resistance to rotation encountered by the molecular pumping mechanism 12 is relatively little, since

the molecular pumping mechanism operates at relatively low pressures. Furthermore, the structure of the drag pumping mechanism 18 with its only moving part being a cylinder rotated about axis A does not suffer significantly from gas resistance to rotation. Therefore, once power and torque characteristics for motor 34 have been selected for regenerative pumping mechanism 14, only a relatively small proportion of extra capacity is needed so that the motor also meets the requirements of molecular pumping mechanism 12. In other words, a 200w motor, which is typically used for a molecular pumping mechanism, is significantly less powerful than motor 34 which preferably is a 2kw motor. In the prior art, the typical motor is not powerful enough so that pressure change in a chamber can be controlled by controlling the rotational speed of the pump. However, since a powerful motor is selected to drive regenerative pumping mechanism 14, the additional power can also be used to control rotational speed of the molecular pumping mechanism and thereby control pressure.

A typical turbomolecular pumping means is evacuated to relatively low pressures before it is started up. In the prior art, a backing pumping mechanism is used for this purpose. Since the backing pumping mechanism and turbomolecular pumping means are associated with the same drive shaft in vacuum pumping arrangement 10, this start up procedure is not possible. Accordingly, the vacuum pumping arrangement forms part of a vacuum pumping system which comprises additional evacuation means to evacuate at least the turbomolecular pumping means 16 prior to start up to a

predetermined pressure. Preferably, the turbomolecular pumping means is evacuated to less than 500 mbar prior to start up. Conveniently, the whole vacuum pumping arrangement is evacuated prior to start up, as shown in Figures 4 and 5. The evacuation means may be provided by an additional pump, although this is not preferred since an additional pump would increase costs of the system. When the pumping arrangement 10 is used as part of a semi-conductor processing system, it is convenient to make use of a pump or pumping means associated with the system such as the pump for the load lock chamber. Figure 4 shows the arrangement of a semiconductor processing system, in which the load lock pump 74 is, in normal use, used to evacuate pressure from load lock chamber 76. A valve 78 is provided between load lock chamber 76 and load lock pump 74. Load lock pump 74 is connected to the exhaust of pumping arrangement 10 via valve 80. A further valve 82 is provided downstream of exhaust 44 of pumping arrangement 10. During start up, valve 78 and valve 82 are closed whilst valve 80 is opened. Load lock pump 74 is operated to evacuate gas from arrangement 10 and therefore from turbomolecular pumping means 16. During normal operation, valves 82 and 78 are opened whilst valve 80 is closed. Arrangement 10 is operated to evacuate pressure from vacuum chamber 84.

Alternatively, vacuum pumping arrangement 10 can be started up as described with reference to Figure 5. The additional evacuation means comprises a high pressure nitrogen supply which is connected to an ejector pump 90 via valve 88. Valve 88 is opened so that high pressure nitrogen is

ejected to evacuate arrangement 10 and therefore turbomolecular pumping means 16. Nitrogen is a relatively inert gas and does not contaminate the system.

Although the pumping arrangement 10 may be evacuated prior to start up, it is also possible to evacuate the arrangement after start up, since the arrangement can be started but will not reach suitable rotational speeds until evacuation is performed.

There now follows a description of three further embodiments of the present invention. For brevity, the further embodiments will be discussed only in relation to the parts thereof which are different to the first embodiment and like reference numerals will be used for like parts.

Figure 6 shows a vacuum pumping arrangement 100 comprising an active magnetic bearing in which a cylindrical pole of the magnetic bearing 54 is mounted to the drive shaft 32 with a like pole being positioned on housing 22. The rotor body 52 of the turbomolecular pumping means 16 of the molecular pumping mechanism, is disc-shaped and the overall size of the arrangement 100 is reduced as compared with the first embodiment.

In Figure 7, a vacuum pumping arrangement 200 is shown in which the turbomolecular pumping means 12 comprises two turbomolecular pumping stages 16. A stator 92 extends radially inwardly from housing part 22 between the two turbo stages 16.

In Figure 8, a vacuum pumping arrangement 300 is shown in which molecular drag pumping mechanism 20 has been omitted.

CLAIMS

1. A vacuum pumping arrangement comprising a drive shaft, a motor for driving said drive shaft, a molecular pumping mechanism and a regenerative
5 pumping mechanism, wherein said drive shaft is arranged for simultaneously driving said molecular pumping mechanism and said regenerative pumping mechanism and said drive shaft is supported by a lubricant free bearing associated with said molecular pumping mechanism.
- 10 2. An arrangement as claimed in claim 1, wherein said lubricant free bearing is a magnetic bearing.
3. An arrangement as claimed in claim 1 or 2, wherein said drive shaft is additionally supported by a lubricated bearing associated with said
15 regenerative pumping mechanism.
4. An arrangement as claimed in claim 3, wherein said lubricated bearing is a rolling bearing.
- 20 5. An arrangement as claimed in any one of the preceding claims, wherein said molecular pumping mechanism comprises molecular drag pumping means.

6. An arrangement as claimed in any one of the preceding claims, wherein said molecular pumping mechanism comprises turbomolecular pumping means.

5 7. An arrangement as claimed in any one of the preceding claims, wherein said regenerative pumping mechanism comprises a stator comprising a plurality of circumferential pumping channels disposed about a longitudinal axis of the drive shaft and a rotor comprising a plurality of arrays of rotor blades extending axially into respective said circumferential pumping
10 channels.

8. An arrangement as claimed in claim 7, wherein said rotor of said regenerative pumping mechanism is connected to said drive shaft so as to be sufficiently close to said lubricated bearing so that radial movement of said
15 drive shaft at said lubricant free bearing translates substantially to axial movement of said rotor blades relative to respective said circumferential pumping channels.

9. An arrangement as claimed in claim 7 or 8, when claim 7 is appended
20 to claim 3 or 4, wherein said lubricated bearing and said circumferential pumping channels are substantially axially aligned.

10. An arrangement as claimed in any one of claims 7 to 9, wherein said lubricated bearing is housed in the stator of the regenerative pumping mechanism.

5 11. An arrangement as claimed in any one of the preceding claims, comprising a housing which houses the molecular pumping mechanism, the regenerative pumping mechanism, the drive shaft and the motor.

ABSTRACT

VACUUM PUMPING ARRANGEMENT

5 The present invention provides a vacuum pumping arrangement 10
which comprises a drive shaft 32, a motor 34 for driving said drive shaft, a
molecular pumping mechanism 12 and a regenerative pumping mechanism
14, said drive shaft being arranged for simultaneously driving said molecular
pumping mechanism 12 and said regenerative pumping mechanism 14. The
10 drive shaft is supported by a lubricant-free bearing 54 associated with the
molecular pumping mechanism.

[FIGURE 1]

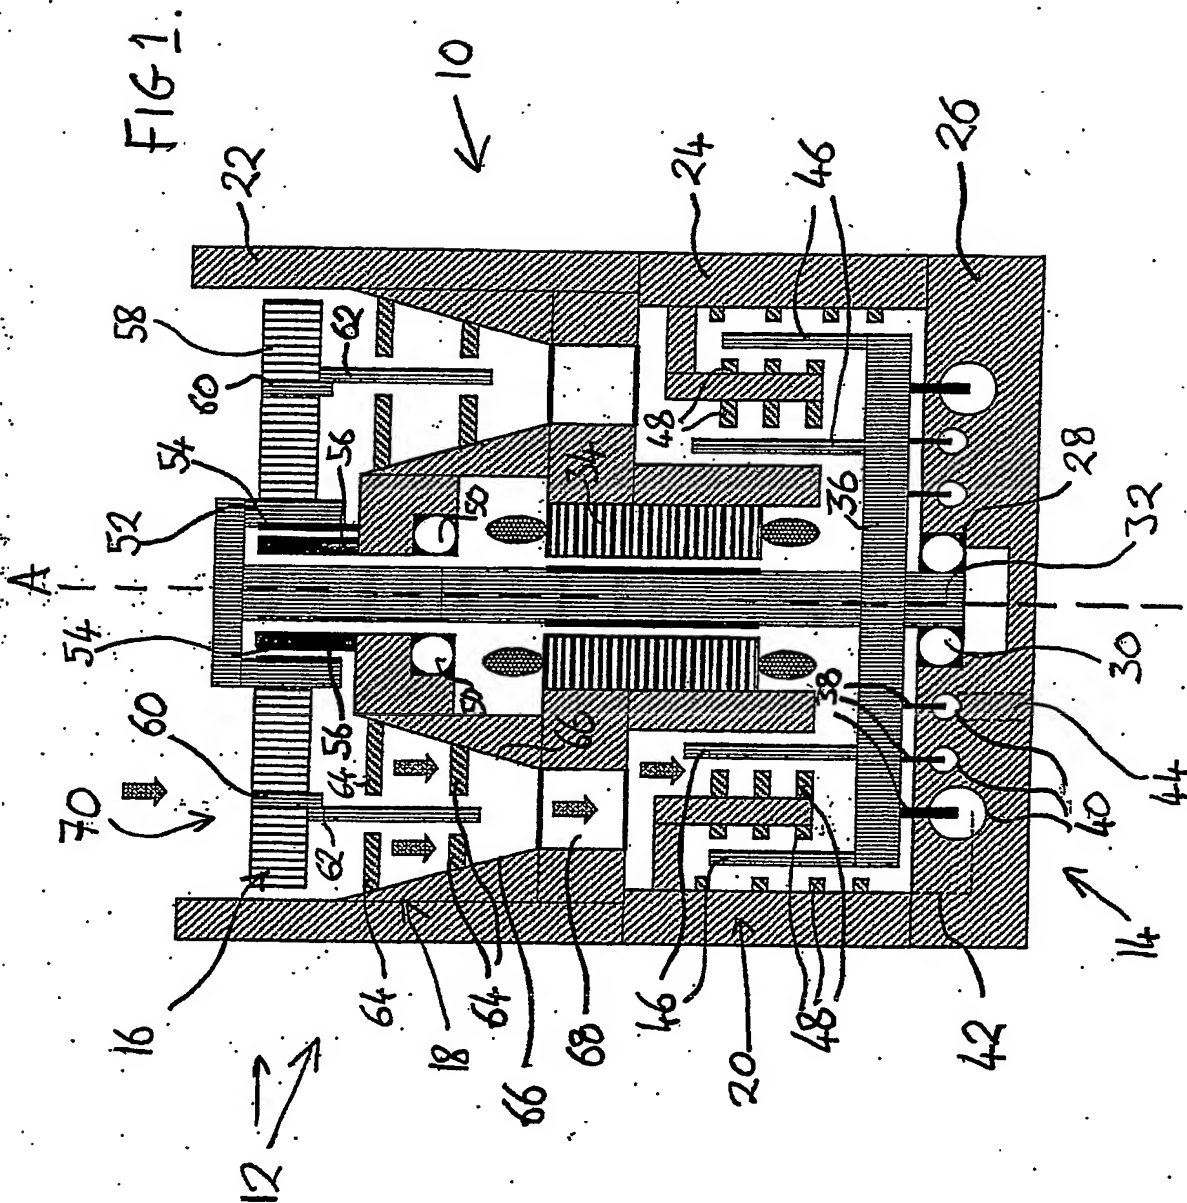


FIG 2



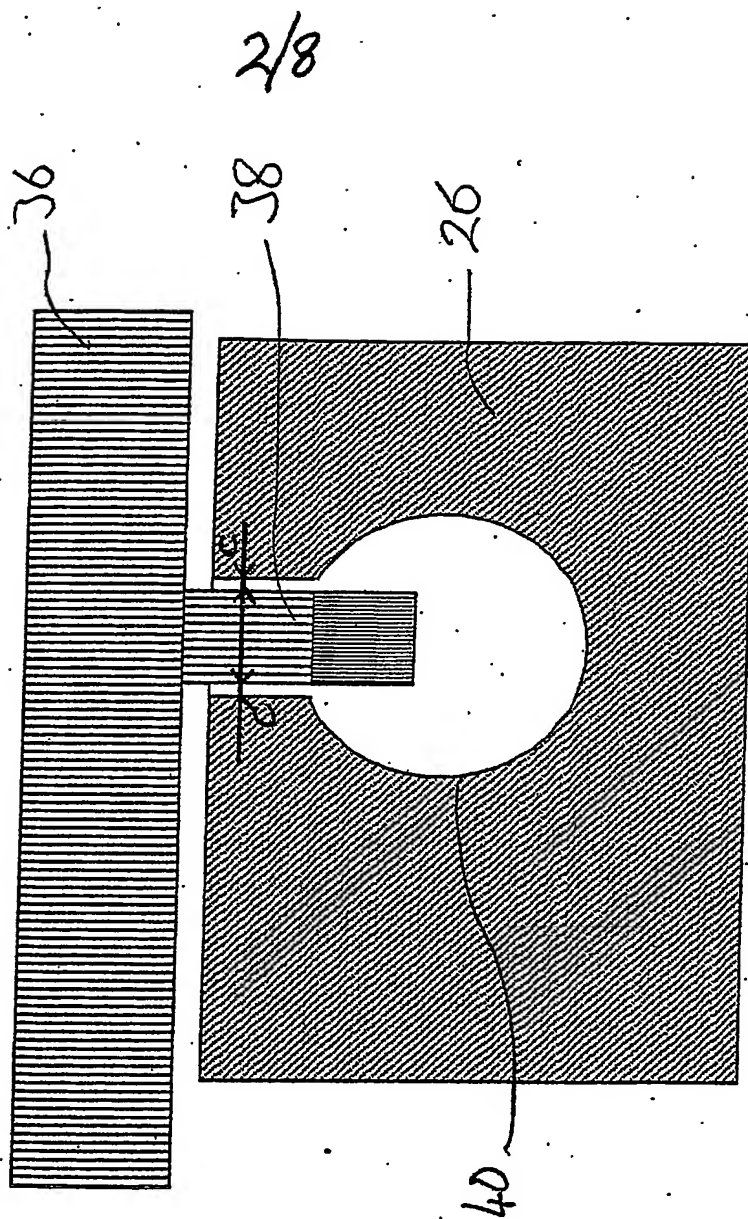


FIG. 3

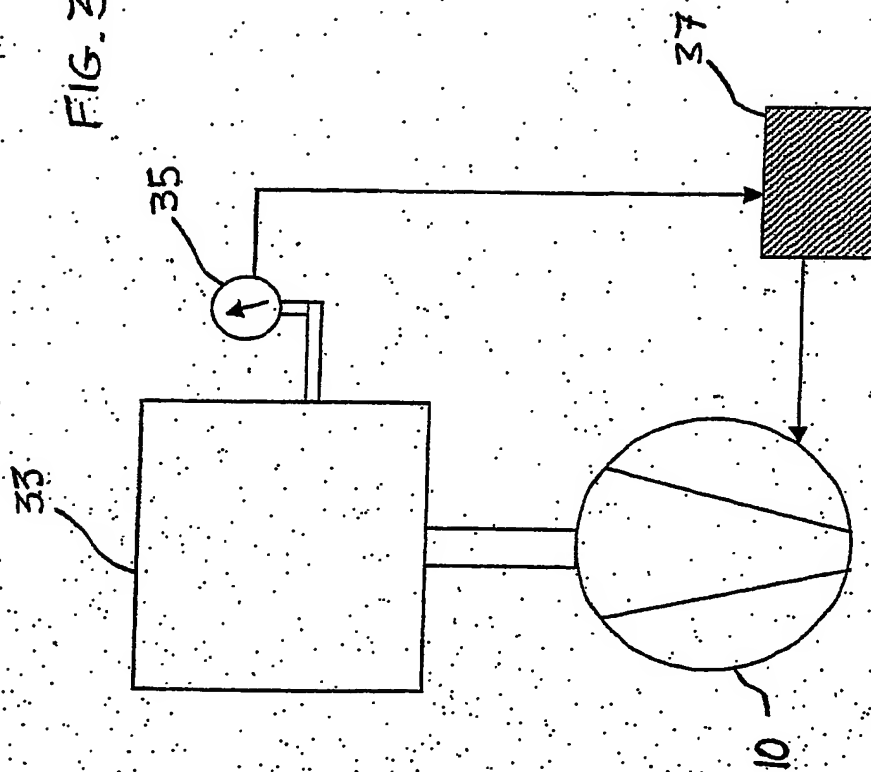


4/8


FIG 4

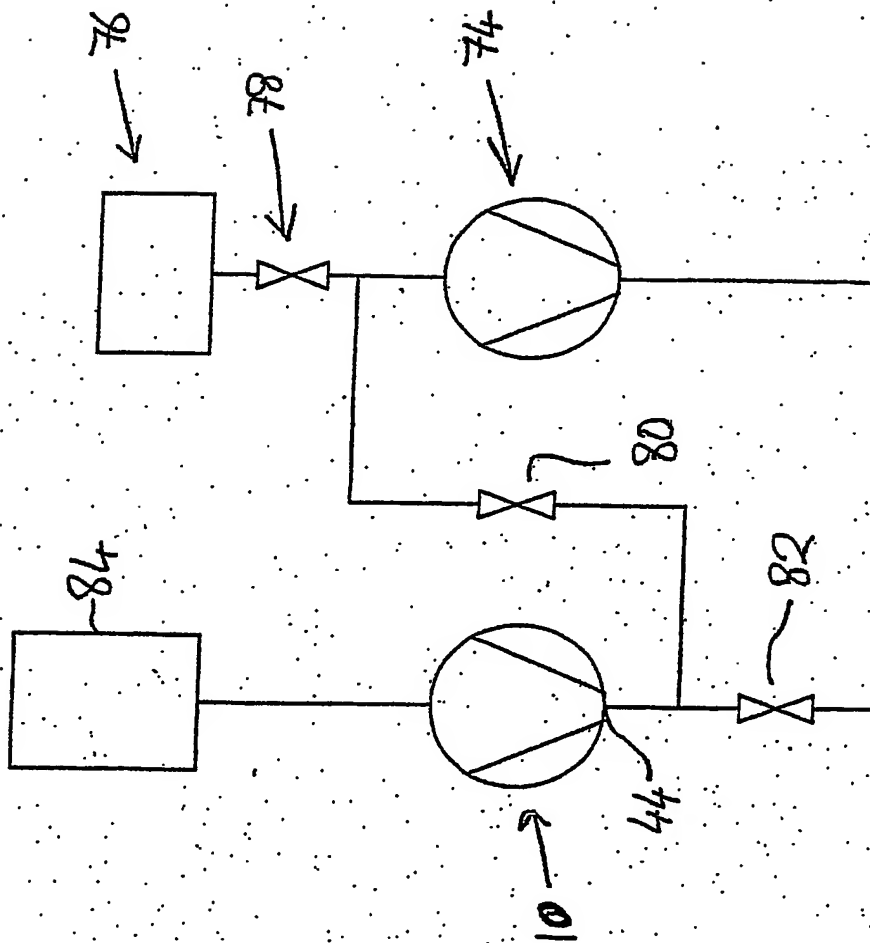


5/8

FIG 5

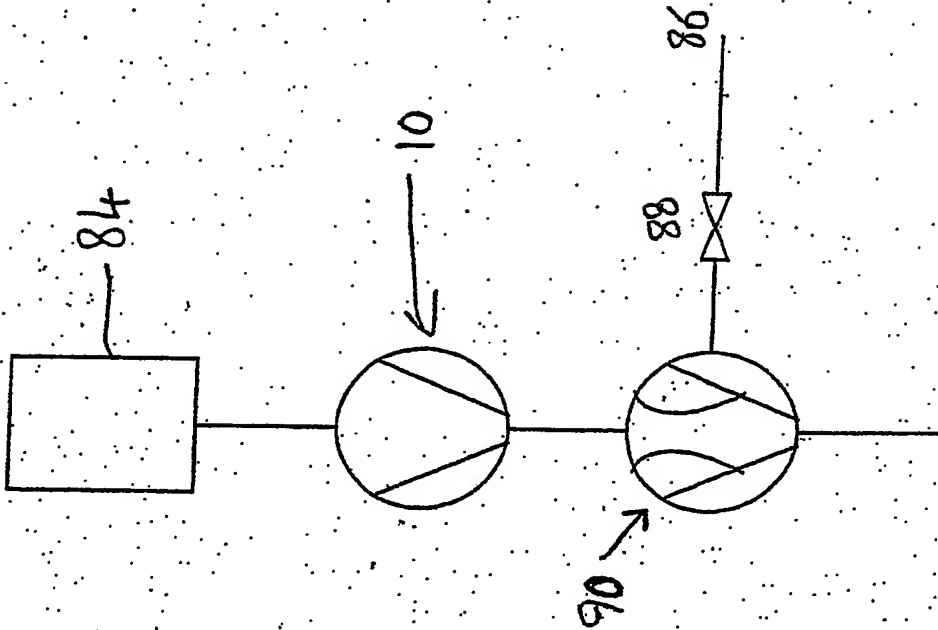


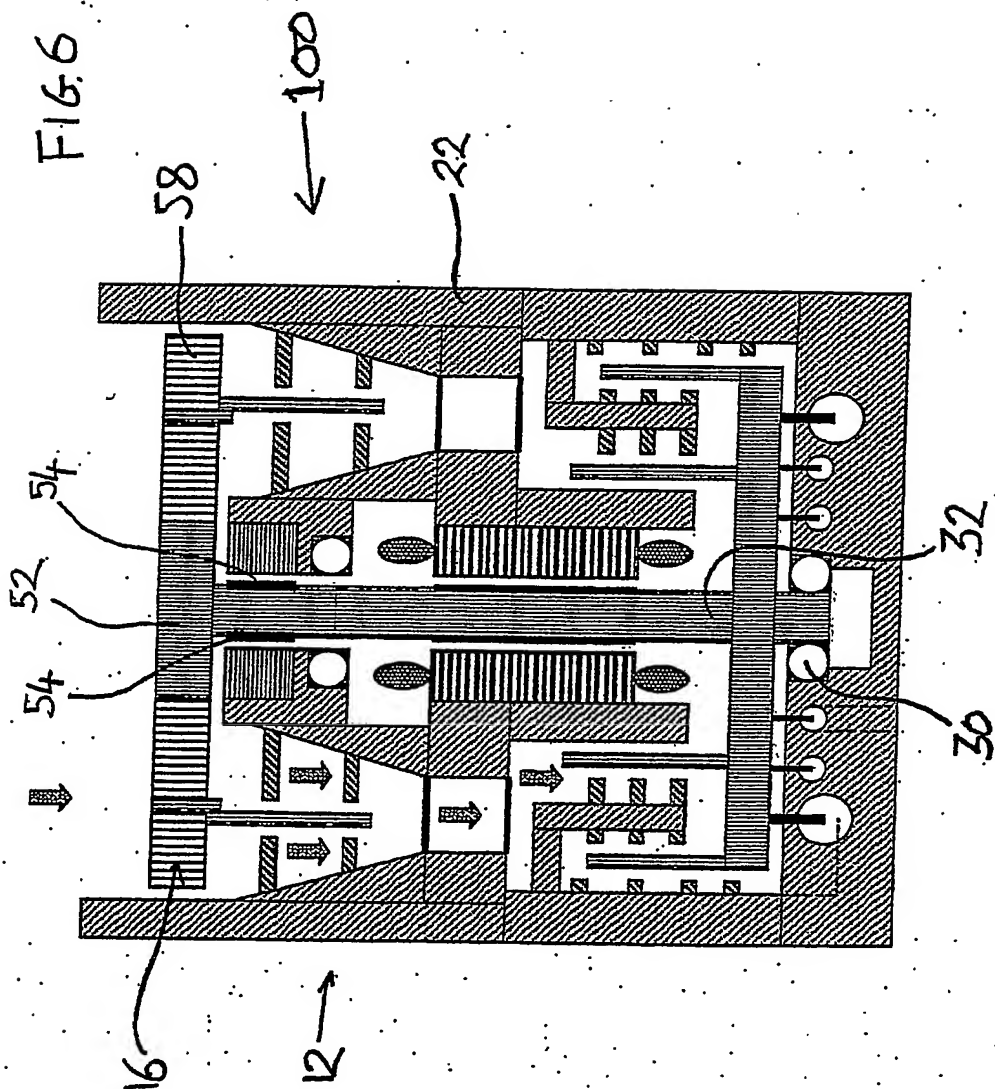

8/7

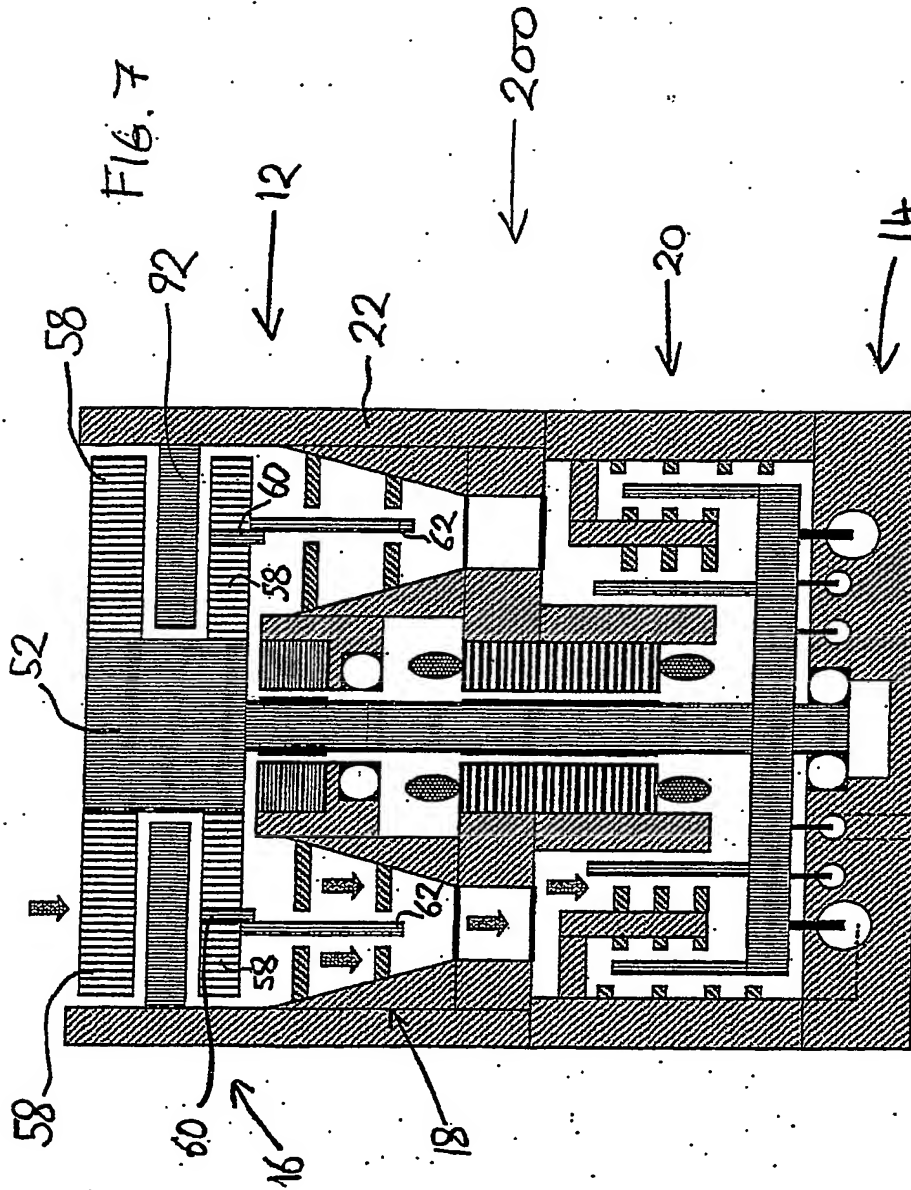

8/8

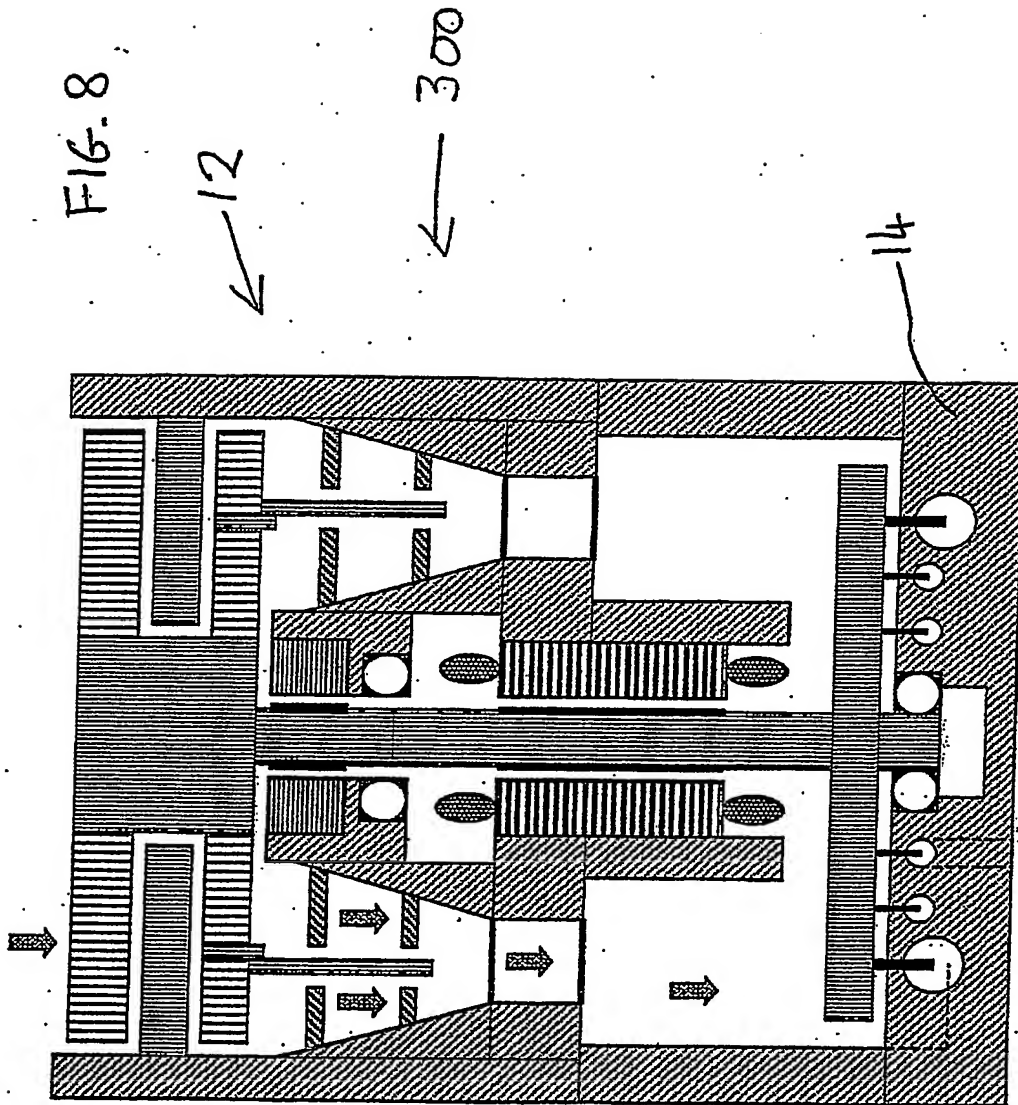

BEST AVAILABLE COPY